




**PDI
Econo-Lock
Locking Terminators**

The Econo-Lock is a corrosion-resistant, nickel plated Locking Terminator. The Terminators are made from die cast zinc and have a concealed tool entry system. The locking engagement characteristics assure some of the highest possible torque and RFI integrity characteristics.

Features:

- Color coded design for easy recognition
- Available with Resistor, without Resistor and Power Blocking for maximum flexibility
- Two independent choices of security type, Two or Three Prong, for a higher level of tamper resistance.
- 15 Year Equivalent Corrosion Protection
- Optional Moisture Resisting Tap Port Protection
- Use with PDI Tool: PTP-59T-2 OR PTP-59T-3

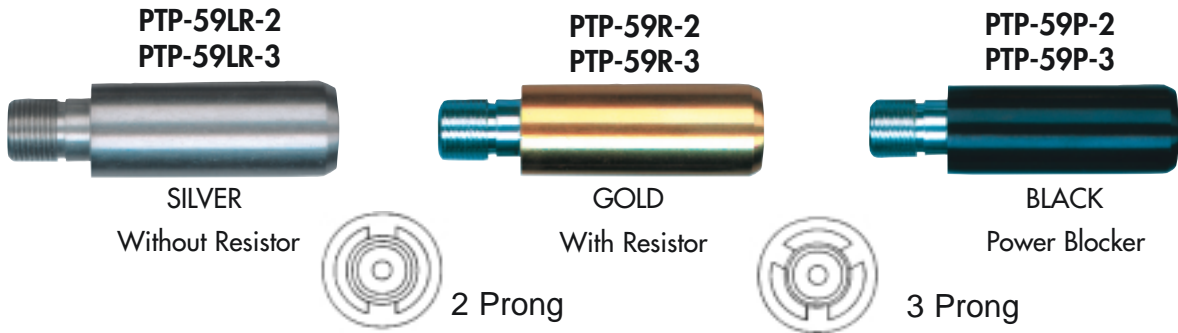

Model	PTP-59LR-2	PTP-59R-2	PTP-59P-2	PTP-59LR-3	PTP-59R-3	PTP-59P-3
Tool Type	2 PRONG	2 PRONG	2 PRONG	3 PRONG	3 PRONG	3 PRONG
Color	Silver	Gold	Black	Silver	Gold	Black
Bandwith	N/A	5-1000MHz	5-1000MHz	N/A	5-1000MHz	5-1000MHz
Return Loss(min)	N/A	25db	25db	N/A	25db	25db
Shielding Effectiveness	>110db					
Temperature Range	-40°F to 140°F					
Power Blocking Voltage	N/A	N/A	DC-130VAC@60Hz	N/A	N/A	DC-130VAC@60Hz
Common Path Intermodulation	N/A	<-90dBc		N/A	<-90dBc	
Nominal Center Conductor Diameter	N/A	0.030 inches	0.030 inches	N/A	0.030 inches	0.030 inches
F Port Dimension	SCTE Compliant					
Rotator/Terminator Material	Nickel Plated Zinc					
Housing Material	Nickel Plated Zinc					

Specifications are subject to change without notification